
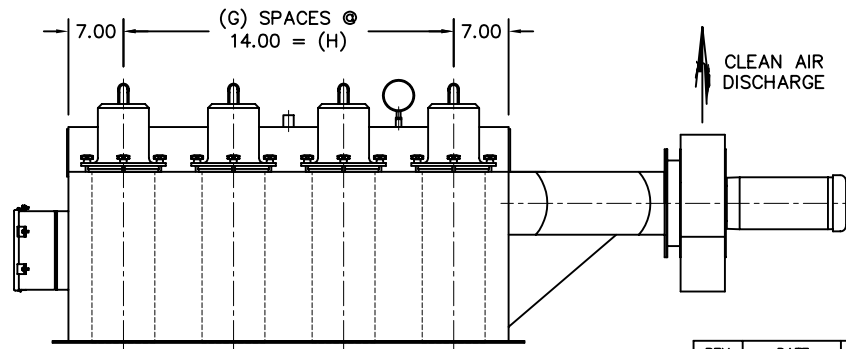
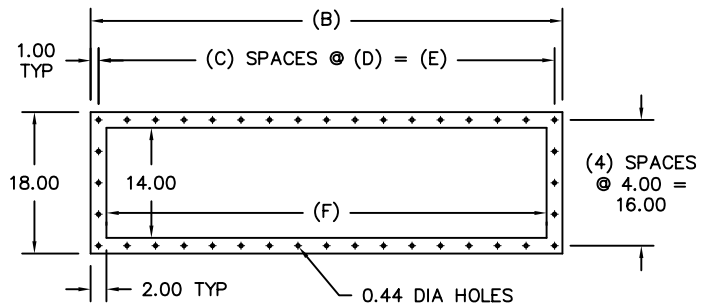


MODEL	EST WGT	# FILTER	CLOTH AREA	FILTER LGTH	A	B	C	D	E	F	G	H
VML95	220 LB*	2	95 SQ FT	22.00	28.00	32.00	8	3.75	30.00	28.00	1	14.00
VML140	353 LB*	3	140 SQ FT	22.00	42.00	46.00	11	4.00	44.00	42.00	2	28.00
VML185	485 LB*	4	185 SQ FT	22.00	56.00	60.00	16	3.63	58.00	56.00	3	42.00
VML235	618 LB*	5	235 SQ FT	22.00	70.00	74.00	18	4.00	72.00	70.00	4	56.00
VML280	750 LB*	6	280 SQ FT	22.00	84.00	88.00	16	5.38	86.00	84.00	5	70.00
VML330	883 LB*	7	330 SQ FT	22.00	98.00	102.00	25	4.00	100.00	98.00	6	84.00
VML375	1015 LB*	8	375 SQ FT	22.00	112.00	116.00	24	4.75	114.00	112.00	7	98.00

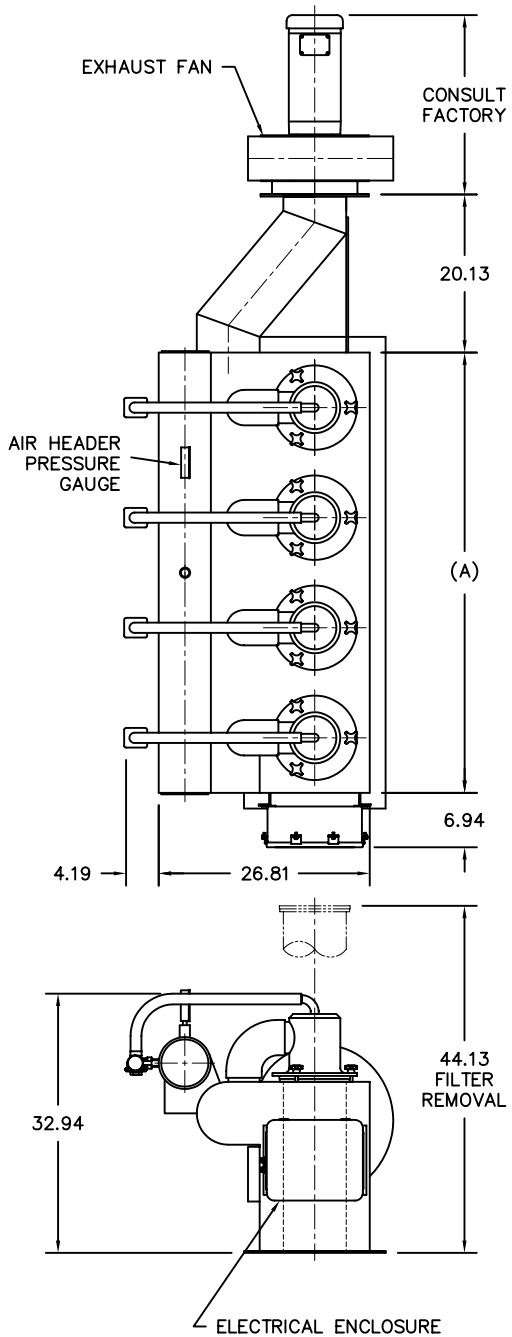

**GENERAL NOTES:**

ALL INDUSTRIAL VOLTAGES AVAILABLE FOR ELECTRICAL COMPONENTS.

PREWIRING OF ELECTRICAL COMPONENTS TO VMV HOUSING JUNCTION BOX OPTIONAL.

ELECTRICAL ENCLOSURES NEMA 4 STANDARD. NEMA 4X, 7, AND 9 OPTIONAL.

METAL SURFACES ARE POWER TOOL CLEANED, PRIMED, AND FINISHED WITH INDUSTRIAL ENAMEL.

AIR REQUIREMENTS FOR COMPRESSED AIR HEADER ARE (16) CFM @ (80-100) PSI.

SPECIFICATIONS AND/OR DIMENSIONAL DATA ARE SUBJECT TO CHANGE. CONSULT DCL FOR CERTIFIED DRAWINGS.

\*ESTIMATED WEIGHTS DO NOT INCLUDE OPTIONAL EQUIPMENT, ELECTRICAL COMPONENTS OR EXHAUST FAN.

REV	DATE	BY	DCL SPECIALISTS IN ADVANCED DESIGN LOADING SYSTEMS		P.O. BOX 125 CHARLEVOIX, MICHIGAN 49720 (231) 547-5800
			TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONAL: 1/16" DECIMAL: .06 ANGULAR: 1/2		DRAWN BY: JNM SCALE: NONE
					CHECKED BY: ENG DATE: 10-04-03
B	09-24-07	JNM	TITLE	DRAWING No: VML-10001	
A	07-22-02	JNM	VML VENTILATION MODULE		